

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
29 January 2004 (29.01.2004)

PCT

(10) International Publication Number
WO 2004/009294 A1

- (51) International Patent Classification⁷: **B25B 5/06**
- (21) International Application Number:
PCT/IL2003/000601
- (22) International Filing Date: 22 July 2003 (22.07.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
150884 23 July 2002 (23.07.2002) IL
- (71) Applicant (for all designated States except US): **TEFEN-PLAST (KIRUR) LTD.** [IL/IL]; PO Box 25, 24959 Tefen (IL).
- (71) Applicant and
(72) Inventor: **BEN-GIGI, Zion** [IL/IL]; 36 HaHatzav Street, 25147 Kfar Veradim (IL).
- (74) Agent: **KLEIN, David**; Dekel Patent Ltd., Beit HaRof'im, 18 Menuha VeNahala Street, Suite 27, 76209 Rehovot (IL).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: BAR CLAMP

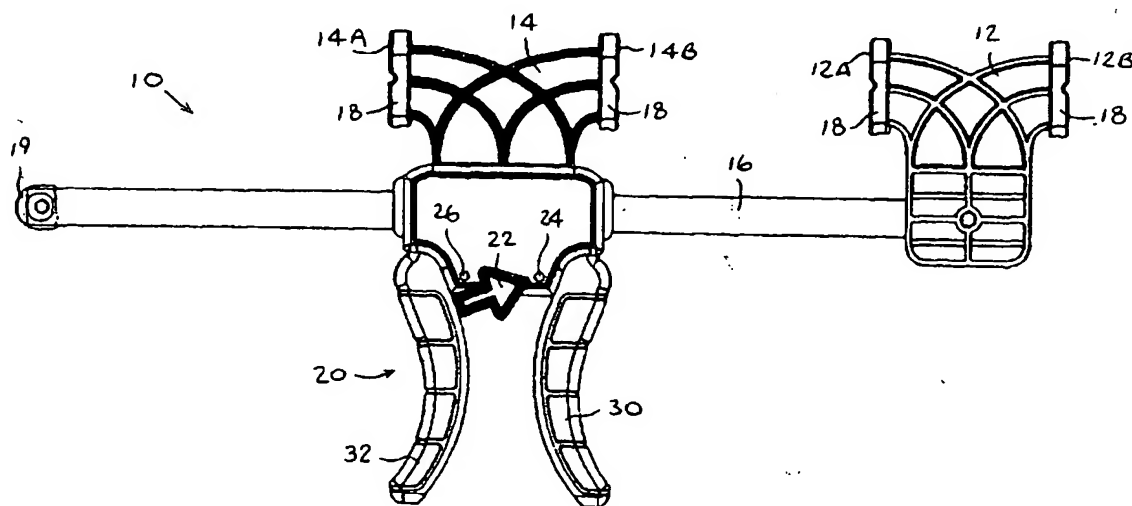

(57) Abstract: A bar clamp (10) comprising a bar (16), a first clamping jaw (12) mounted on the bar, a second clamping jaw (14) slidably mounted on the bar, at least one of the clamping jaws (12, 14) comprising a double-faced clamping jaw (12A, 12B, 14A, 14B) comprising one face facing one end of the bar and another face facing an opposite end of the bar, wherein centers of both faces of the double-faced clamping jaw are positioned at substantially equal heights from the bar, and a jaw advancing mechanism (20) coupled to the second clamping jaw (14) and adapted to move the second clamping jaw (14) selectively towards or away from the first clamping jaw (12).